







Transport bag
included



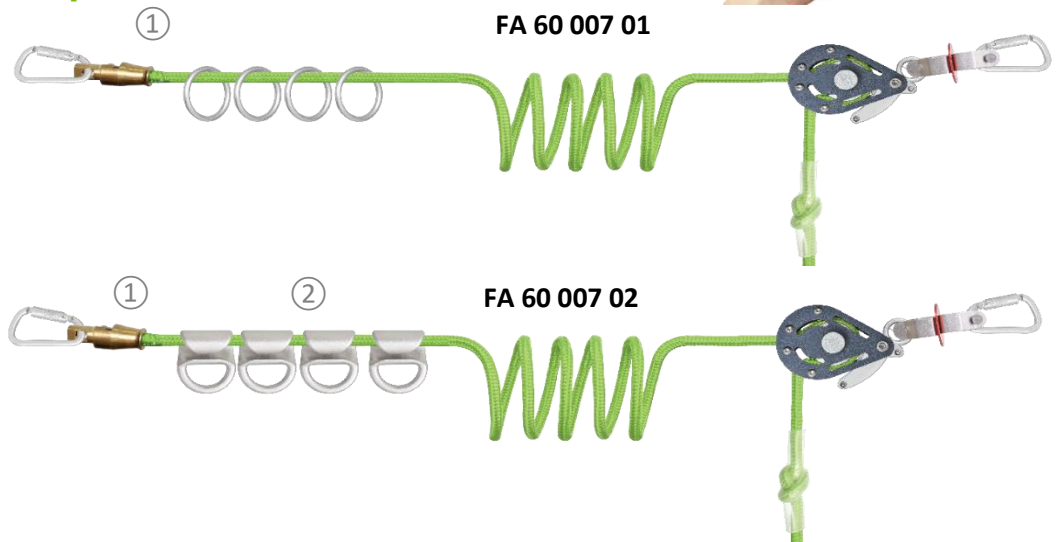




①

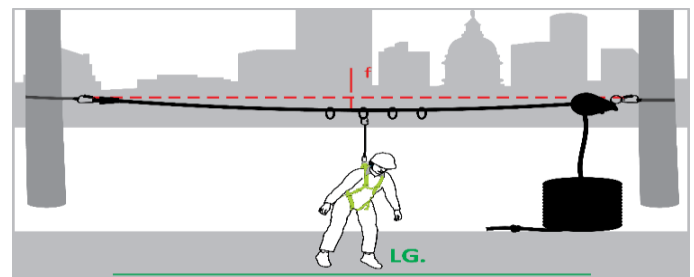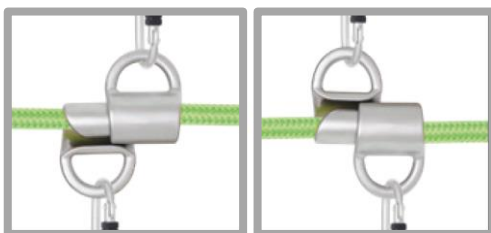360°

②



| |
|---|
| HS CODE |
| 63079098 |
| CARTON SIZE / PCS. |
| 40 x 40 x 24 cm / 1 |
| AET (UE) N°2777/13802-01/E01-01 |
| Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland |
| MODULE D FI14/14003.01 |
| SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland |
| AET (UKCA) N°AB0321/16007-01/E01-01 |
| Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom |
| MODULE D 11 IN14/14003 |
| SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom |

| REF. | FA 60 007 01 | FA 60 007 02 |
|--|--|--------------|
| CE | PPE regulation (EU) 2016/425 Annex II using EN 795:2012, TS 16415:2013 | |
|  | x4 | |
| MAT. |  16 mm Polyester | |
| R (kN) / MBS (kN) | 21 kN / 23 kN | |
| MAT.  |  | |
| LG. / f MIN. → MAX. | 5.0 m → 25.0 m / 1.2 m → 4.83 m | |
| + | | |
|  | 11.64 KG | 12.03 KG |



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Matière connecteur / tendeur
Material of connector / tensioner
Material del conector / tensor
Materia del connetore / tenditore
Material Verbinder / Spanner

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

LG. / f MIN. MAX.

Longueur mini → maxi / Flèche mini → maxi
Min. → Max. length / Min. → Max. deflection
Longitud mínima → máxima / Flecha mínima → máxima
Lunghezza min. → max. / Flessione min. → max.
Länge min. → max. / Dirchhang min. → max.